

# DGD1005AV



## H.265 5MP PENTABRID 4CH XVR

### FEATURES


#### H.265 Compression Technology

- ❖ The recording capacity is greatly enhanced as well as bandwidth saving for better efficiency and performance than the systems employing other compression formats



#### Scenario Customization

- ❖ Allows you to customize a series of actions which will be run automatically after the specified event occurs. There are several scenario templates for you to choose when and what to do after a specific event occurs.

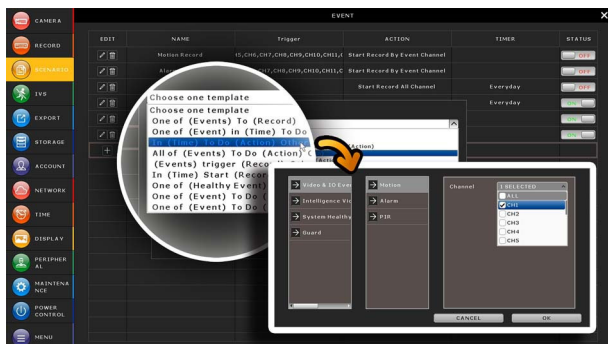

#### Free P2P Cloud EaZy Networking

- ❖ Cloud EaZy Networking available to connect this device to Internet automatically in three steps with our free mobile app, EagleEyes.
- ❖ The "Buddy" feature to share the device access permission to other people.
- ❖ Device login / out notifications reported.

#### Push Video & Push Status -

#### Active Event Notification with EagleEyes App


- ❖ Push Video to send instant notifications for an alarm event when an alarm device is connected to the camera which supports external alarm device connection/
- ❖ Push Status to send instant notifications for system events, such as video loss or HDD data removal.

#### Pentabrid Video Input

- ❖ 4 channels of IP / TVI / CVI / Analog HD / 960H video input
- ❖ Up to 5MP display & recording

#### Event Pop-up / Preview

- ❖ All events are listed on the right panel with corresponding event icons for you to quickly recognize the event type. The most current one will flash to catch your attention. Click one event and you're able to preview the footage with pre-alarm images.

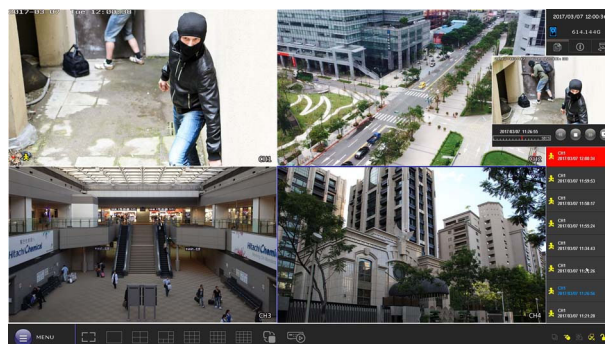

#### Video Backup

- ❖ Regular backup could be configured to automatically copy video footages to the specified location (USB drive or FTP) at the specified time.

#### Remote Surveillance

- ❖ Fully compatible with iOS and Android devices, and web browsers on Windows & MAC operating systems
- ❖ CMS Lite for 32 devices central management

## ► SPECIFICATIONS

### ▼ Video

Video System		NTSC / PAL (auto detection)
Video Compression Format		H.265
Video Signal		IP / TVI / CVI / Analog HD / 960H
Video Input		4 pentabrid channels (IP / TVI / CVI / Analog HD / 960H)
Video Input Interface	Analog Mode	Composite video signal 1 Vp-p 75Ω BNC
	IP Mode	Ethernet, 10/100 Base-T
Video Output	BNC	YES
	VGA*	YES
	HDMI	YES (4K2K display)
Video Resolution	Analog Mode	8MP Lite / 5MP / 5MLITE / 4MP / 4MLITE / FHD (1080P) / HD / 960H / Frame / CIF
	IP Mode	2592 x 1944 / 2048 x 1536 / 1920 x 1080 / 1280 x 720 / 720 x 480 / 352 x 240
Live Display Mode	Local	4CH
	Remote	4CH
Playback Display Mode	Local	4CH
	Remote	4CH

### ▼ Record & Backup

Max. Recording Rate	Analog Mode	Up to 28 IPS @ 8MP Lite Up to 24 IPS @ 5MP Up to 32 IPS @ 4MP Up to 60 IPS @ FHD (1080P)
	IP Mode	UP to 60 IPS @ 2592 x 1944 (5MP) UP to 96 IPS @ 2048 x 1536 (3MP) UP to 120 IPS @ 1920 x 1080
Recording Mode		Manual / Timer / Motion / Alarm / Remote
Quick Search		Time / Motion / Alarm search mode
Backup Device		USB 2.0 drive / Network
Regular Backup		YES

### ▼ Audio

Audio Input	4
Audio Output	1 (Mono)

### ▼ External I/O

RS485	YES
Alarm Input	4
Alarm Output	1

### ▼ General

Hard Disk Storage	20TB SATA HDD x 1 or external disk array x 1 connected to the recorder via the eSATA interface
SATA Interface	YES
eSATA Interface	Expandable with a SATA to eSATA cable
Image Quality Setting	SUPER BEST / BEST / HIGH / NORMAL
USB Mouse Control	YES
Motion Detection Area	16 × 12 grids per channel
Motion Detection Sensitivity	3 adjustable parameters for accurate detection
Event Notification	Push Video / Push Status / FTP / E-Mail
Event Pop-up & Preview	YES
Scenario Setup	YES
Picture Zoom	8X digital zoom
PTZ Control	YES
Key Lock (Password Protection)	YES
User Level	4 user levels for different access privilege
Video Loss Detection	YES

## SPECIFICATIONS

### ▼ General

Video Adjustable	Hue / Saturation / Contrast / Brightness
Date Display Format	YY/MM/DD, DD/MM/YY & MM/DD/YY
Daylight Saving	YES
Power Source (±10%)	12V / 2A
Operating Temperature	0°C ~ 40°C (32°F ~104°F)女
Operating Humidity	10% ~ 85%
Dimensions(mm)**	260 x 235.7 x 48
Net Weight (kg)	1.3

### ▼ Network

Ethernet	10/100 Base-T. Supports remote control and live view via Ethernet
Network Protocol	TCP/IP, PPPOE, DHCP and DDNS

### ▼ Remote Surveillance from PC

Compatible Operating System	Windows & MAC	
Compatible Program	Web browser	Windows Edge, Google Chrome, Mozilla Firefox & Opera on Windows 10 (and later versions) and Google Chrome & Mozilla Firefox on MAC
	PC program	32CH CMS software for Windows OS
Max. online users	40	
Web Transmitting Compression Format	H.265	
Network Live Audio	YES	
Remote Event Download & Playback	YES	

### ▼ Mobile Surveillance

App	EagleEyes
Compatible Devices	iOS & Android devices
Push Video	YES (4 channels)
Push Status	YES

### ▼ Others

EaZy Networking	YES
DCCS Support	YES
AVTECH Free DDNS service	YES
Privacy Mask	YES
Multiplex Operation	Live display / record / playback / backup / network operations
System Recovery	System auto recovery after power failure
Optional Peripherals	SATA to eSATA cable (PWSC07F120200)
Certification	CE / UL (Power Adapter)

\* The VGA display will be off when the HDMI display is set to 4K2K.

\*\* The specifications are subject to change without notice.

\*\*\* Dimensional tolerance: ±5mm

## REAR PANEL

