DGD2404A











QUADBRID 4CH REAL-TIME HD CCTV DVR

FEATURES

Free P2P Cloud EaZy Networking*

- Cloud EaZy Networking available to connect this device to Internet automatically in three steps with our free mobile app, EagleEyes.
- The "Buddy" feature to share the device access permission to other people.
- Device login / out notifications reported.



Video Backup

Regular backup could be configured to automatically copy video footages to the specified location (USB drive or FTP) at the specified time.

Remote Surveillance

- Fully compatible with iOS and Android devices, and Internet Explorer on Windows operating system
- CMS Lite for 32 devices central management
- ❖ Applicable also to Apple's media player, QuickTime.

Quadbrid Video Input

- Supports Analog HD / TVI / CVI / 960H video input
- ❖ All channels at 1080P real-time recording




Push Status -

Active Event Notification with EagleEyes App

Push Status to send instant notifications for system events, such as video loss or HDD data removal.



REAR PANEL

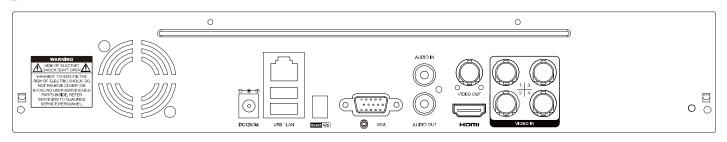

SPECIFICATIONS

▼ Video			
Video System		NTSC / PAL (auto detection)	
Video Compression Format		H.264	
Video Signal		Analog HD / TVI / CVI / 960H	
Video Input		4 channelS(Composite video signal 1 Vp-p 75Ω BNC)	
Video Output	BNC	YES (Main Monitor / Call Monitor selectable)	
·	VGA	YES	
	HDMI	YES	
Video Resolution		1080P / 720P / QHD / 960H / Frame / Field / CIF	
▼ Record & Backu	ıp		
Max. Recording Rate		Up to 120 IPS @ 1920 x 1080	
Recording Mode		Manual / Timer / Motion / Remote	
Pre-alarm Recording		YES	
Playback Channel		4CH	
Quick Search		Time / Motion search mode	
Backup Device		USB 2.0 drive / Network	
Regular Backup		YES	
▼ Audio			
Audio Input		1 audio input	
Audio Output		1 audio output (Mono)	
▼ General		1 dadio odipat (mono)	
		AOTE OATA HERE. O	
Hard Disk Storage		10TB SATA HDD x 2	
SATA Interface		YES	
Image Quality Setting		SUPER BEST / BEST / HIGH / NORMAL	
USB Mouse Control		YES	
Motion Detection Area		16 × 12 grids per channel	
Motion Detection Sensitivity		3 adjustable parameters for accurate detection	
Event Notification		Push Status / FTP / E-Mail	
Picture Zoom		2X digital zoom	
PTZ Control		YES	
RS485		YES	
IR Remote Control		YES (IR receiver built-in)	
Key Lock (Password Protection)		YES	
User Level		4 user levels for different access privilege	
Video Loss Detection		YES	
Camera Title		Supports up to 25 letters	
Video Adjustable		Hue / Saturation / Contrast / Brightness	
Date Display Format		YY/MM/DD, DD/MM/YY & MM/DD/YY	
Daylight Saving		YES	
Power Source (±10%)		DC12V / 3A	
Operating Temperature		10°C ~ 40°C (50°F ~104°F)	
Operating Humidity		10% ~ 85%	
Dimensions (mm)**		345(W) × 58.8(H) × 223(D)	
Net Weight (kg)		2.2	

SPECIFICATIONS

▼ Network			
Ethernet	10/100 Base-T. Supports remote control and live view via Ethernet		
Network Protocol	TCP/IP, PPPOE, DHCP and DDNS		
▼ Remote Surveillance from PC			
Compatible Operating System	Windows & MAC		
Compatible Program	Web Browser:	Internet Explorer, Google Chrome & Safari	
	CMS Lite:	32CH central management software for Windows OS	
	QuickTime:	For both Windows and MAC operating systems	
Max. online users	20		
Web Transmitting Compression Format	H.264		
Network Live Audio	YES		
Remote Independent Operation	YES		
Remote Event Download & Playback	YES		
▼ Mobile Surveillance			
Арр	EagleEyes		
Compatible Devices	iOS & Android devices		
Push Status	YES		
▼ Others			
EaZy Networking	YES		
DCCS Support	YES		
AVTECH Free DDNS service	YES		
Privacy Mask	YES		
Multiplex Operation	Live display / record / playback / backup / network operations		
System Recovery	System auto recovery after power failure		
Optional Peripherals	HDMI Matrix (HDM02) / USB Joystick (AVX102)		

^{*} The specifications are subject to change without notice.

** Dimensional tolerance: ±5mm