


DGD8132



8-BAY QUADBRID 32CH XVR

FEATURES

Free P2P Cloud EaZy Networking

- ❖ Cloud EaZy Networking available to connect this device to Internet automatically in three steps with our free mobile app, EagleEyes.
- ❖ The “Buddy” feature to share the device access permission to other people.
- ❖ Device login / out notifications reported.



Push Status -


Active Event Notification with EagleEyes App

- ❖ Push Status to send instant notifications for system events, such as video loss or HDD data removal.




Quadbrid Video Input

- ❖ Supports Analog HD / TVI / CVI / 960H video input
- ❖ Up to 1080P recording

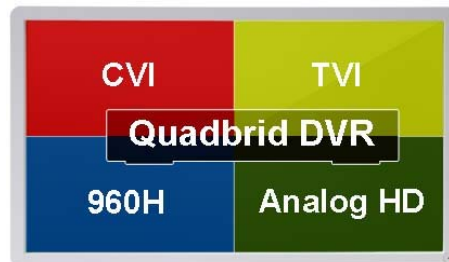

Spot Monitor

- ❖ In addition to the main display via the HDMI output, you can assign a secondary display to show live view, call monitor or event monitor.

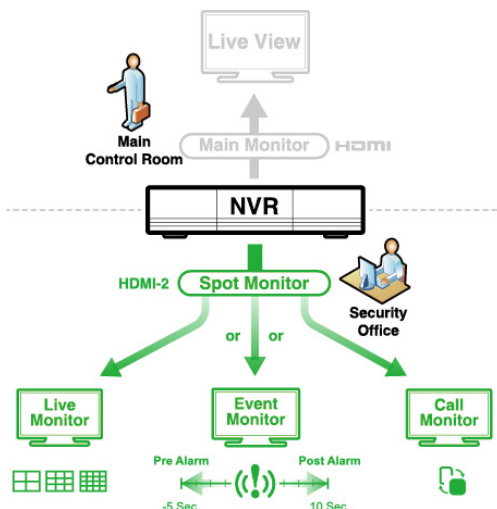

8-bay Storage Capacity

- ❖ To solve the large storage requirement of 1080P recording, this recorder supports up to 8 hard disks to keep high quality video data without overwriting data so quickly. A power-saving mechanism is also adopted to reduce power consumption.

▶ SPECIFICATIONS

▼ Video		
Video System	NTSC / PAL (auto detection)	
Video Compression Format	H.264	
Video Signal	TVI / CVI / Analog HD / 960H	
Video Input	32 channels (Composite video signal 1 Vp-p 75Ω BNC)	
Video Output	BNC	YES (Spot Monitor supported)
	VGA	YES (1080P display / Spot Monitor supported)
	HDMI	HDMI-1 (4K2K display) / HDMI-2 (1080P display / Spot Monitor supported)
Video Resolution	1080P / 720P / QHD / 960H / Frame / Field / CIF	
▼ Record & Backup		
Max. Recording Rate	Up to 384 IPS @ 1920 x 1080	
Recording Mode	Manual / Timer / Motion / Alarm / Remote	
Pre-alarm Recording	YES	
Playback Channel	16CH	
Quick Search	Time / Motion / Alarm search mode	
Backup Device	USB 3.0 drive / Network	
Regular Backup	YES	
▼ Audio		
Audio Input	16	
Audio Output (Mono)	2	
▼ External I/O		
RS485	YES	
Alarm Input	8	
Alarm Output	1	
▼ General		
Hard Disk Storage	10TB SATA HDD x 8	
SATA Interface	YES	
Image Quality Setting	SUPER BEST / BEST / HIGH / NORMAL	
USB Mouse Control	YES	
Motion Detection Area	16 × 12 grids per channel	
Motion Detection Sensitivity	3 adjustable parameters for accurate detection	
Event Notification	Push Status / FTP / E-Mail	
Picture Zoom	2X digital zoom	
PTZ Control	YES	
IR Remote Control	YES (IR receiver built-in)	
Key Lock (Password Protection)	YES	
User Level	4 user levels for different access privilege	
Video Loss Detection	YES	
Camera Title	Supports up to 25 letters	
Video Adjustable	Hue / Saturation / Contrast / Brightness	
Date Display Format	YY/MM/DD, DD/MM/YY & MM/DD/YY	
Daylight Saving	YES	
Power Source (±10%)	19V/4.7A	
Operating Temperature	10°C ~ 40°C (50°F ~ 104°F)	
Operating Humidity	10% ~ 85%	
Dimensions (mm)**	358mm(L) x 267mm(W) x 152mm(H)	
Net Weight (kg)	5.9 kg	

▶ SPECIFICATIONS

▼ Network	
Ethernet	1000 Base-T. Supports remote control and live view via Ethernet
Network Protocol	TCP/IP, PPPOE, DHCP and DDNS
▼ Remote Surveillance from PC	
Compatible Operating System	Windows & MAC
Compatible Program	Web Browser: Internet Explorer, Safari, Google Chrome & Mozilla Firefox
	CMS Lite: 32CH central management software for Windows OS
Max. online users	20
Web Transmitting Compression Format	H.264
Remote Live Display	9CH (Selectable)
Network Live Audio	YES
Remote Event Download & Playback	YES
▼ Mobile Surveillance	
App	EagleEyes
Compatible Devices	iOS & Android devices
Push Status	YES
▼ Others	
EaZy Networking	YES
Spot Monitor Setup	Call Monitor / Event Monitor / Live Monitor (HDMI-2, VGA & Composite Selectable)
DCCS Support	YES
AVTECH Free DDNS service	YES
Privacy Mask	YES
Multiplex Operation	Live display / record / playback / backup / network operations
System Recovery	System auto recovery after power failure
Optional Peripherals	HDMI Matrix (HDM02) / USB Joystick (AVX102)

* The specifications are subject to change without notice.

** Dimensional tolerance: ±5mm

▶ REAR PANEL

