


# DGD8132



## 8-BAY QUADBRID 32CH XVR


### ▶ FEATURES

#### Free P2P Cloud EaZy Networking

- ❖ Cloud EaZy Networking available to connect this device to Internet automatically in three steps with our free mobile app, EagleEyes.
- ❖ The “Buddy” feature to share the device access permission to other people.
- ❖ Device login / out notifications reported.


#### Alarm Scenario Customization

- ❖ “Scenario” is a new feature allowing you to customize a series of actions which will be run automatically after the specified event occurs. There are several scenario templates for you to choose when and what to do after a specific event occurs.

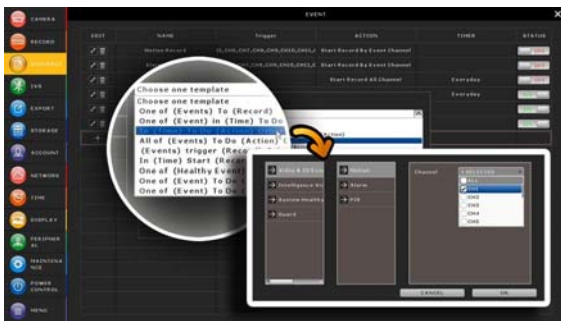

#### Event Pop-up / Preview

- ❖ All events are listed on the right panel with corresponding event icons for you to quickly recognize the event type. The most current one will flash to catch your attention. Click one event and you’re able to preview the footage with pre-alarm images.

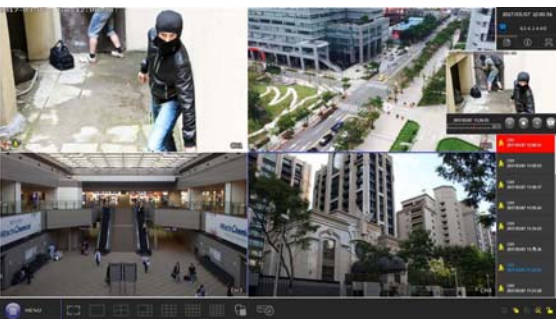


#### Quadbrid Video Input

- ❖ Supports Analog HD / TVI / CVI / 960H video input
- ❖ Up to 1080P recording

#### Spot Monitor

- ❖ In addition to the main display via the HDMI output, you can assign a secondary display to show live view, call monitor or event monitor.

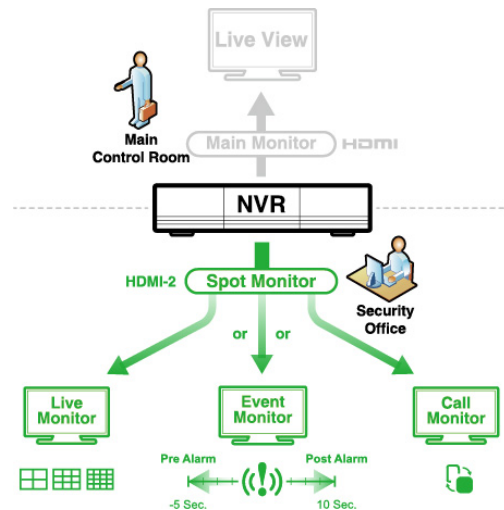

#### Push Status -

#### Active Event Notification with EagleEyes App

- ❖ Push Status to send instant notifications for system events, such as video loss or HDD data removal.

#### 8-bay Storage Capacity

- ❖ To solve the large storage requirement of 1080P recording, this recorder supports up to 8 hard disks to keep high quality video data without overwriting data so quickly. A power-saving mechanism is also adopted to reduce power consumption.

## ▶ SPECIFICATIONS

▼ Video		
Video System	NTSC / PAL (auto detection)	
Video Compression Format	H.264	
Video Signal	TVI / CVI / Analog HD / 960H	
Video Input	32 channels (Composite video signal 1 Vp-p 75Ω BNC)	
Video Output	BNC	YES (Spot Monitor supported)
	VGA	YES (1080P display / Spot Monitor supported)
	HDMI	HDMI-1 (4K2K display) / HDMI-2 (1080P display / Spot Monitor supported)
Video Resolution	1080P / 720P / QHD / 960H / Frame / Field / CIF	
▼ Record & Backup		
Max. Recording Rate	Up to 384 IPS @ 1920 x 1080	
Recording Mode	Manual / Timer / Motion / Alarm / Remote	
Pre-alarm Recording	YES	
Playback Channel	16CH	
Quick Search	Time / Motion / Alarm search mode	
Backup Device	USB 3.0 drive / Network	
Regular Backup	YES (USB hard drive or FTP)	
▼ Audio		
Audio Input	16	
Audio Output (Mono)	2	
▼ External I/O		
RS485	YES	
Alarm Input	8	
Alarm Output	1	
Alarm Scenario	YES	
▼ General		
Hard Disk Storage	10TB SATA HDD x 8	
SATA Interface	YES	
Image Quality Setting	SUPER BEST / BEST / HIGH / NORMAL	
USB Mouse Control	YES	
Motion Detection Area	16 × 12 grids per channel	
Motion Detection Sensitivity	3 adjustable parameters for accurate detection	
Event Notification	Push Status / FTP / E-Mail	
Picture Zoom	2X digital zoom	
PTZ Control	YES	
Key Lock (Password Protection)	YES	
User Level	4 user levels for different access privilege	
Video Loss Detection	YES	
Camera Title	Supports up to 25 letters	
Video Adjustable	Hue / Saturation / Contrast / Brightness	
Date Display Format	YY/MM/DD, DD/MM/YY & MM/DD/YY	
Daylight Saving	YES	
Power Source (±10%)	19V/4.7A	
Operating Temperature	10°C ~ 40°C (50°F ~ 104°F)	
Operating Humidity	10% ~ 85%	
Dimensions (mm)**	358mm(L) x 267mm(W) x 152mm(H)	
Net Weight (kg)	5.9 kg	

## ► SPECIFICATIONS

▼ Network	
Ethernet	1000 Base-T. Supports remote control and live view via Ethernet
Network Protocol	TCP/IP, PPPOE, DHCP and DDNS
▼ Remote Surveillance from PC	
Compatible Operating System	Windows & MAC
Compatible Program	Web Browser: <ul style="list-style-type: none"> <li>■ Windows Edge, Internet Explorer (Windows 8 and later version)</li> <li>■ Safari, Google Chrome &amp; Mozilla Firefox (Windows Vista and later version)</li> </ul>
	CMS Lite:
Max. online users	20
Web Transmitting Compression Format	H.264
Remote Live Display	9CH (Selectable)
Network Live Audio	YES
Remote Event Download & Playback	YES
▼ Mobile Surveillance	
App	EagleEyes
Compatible Devices	iOS & Android devices
Push Status	YES
▼ Others	
EaZy Networking	YES
Alarm Scenario Setup	YES
Spot Monitor Setup	Call Monitor / Event Monitor / Live Monitor (HDMI-2, VGA & Composite Selectable)
DCCS Support	YES
AVTECH Free DDNS service	YES
Privacy Mask	YES
Multiplex Operation	Live display / record / playback / backup / network operations
System Recovery	System auto recovery after power failure
Optional Peripherals	HDMI Matrix (HDM02) / USB Joystick (AVX102)

\* The specifications are subject to change without notice.  
 \*\* Dimensional tolerance: ±5mm

## ► REAR PANEL

