

## DGM3107AT



3MP



H.265



Starlight



PoE



Human Detection



MIC built-in




WDR

### AI-based 3MP H.265 IR Bullet IP Camera

#### FEATURES

- **Starlight visibility** to offer clear & color images even at night
- **AI-based human detection** supported to avoid false detection alarms
- **ONVIF** standard supported to simplify system integration
- **POE (Power-over-Ethernet)** support to eliminate the use of power cables and reduce installation costs
- **Microphone built-in** for audio recording
- IR effective range **up to 25 meters** for night surveillance
- **WDR** to increase image recognizability in overexposure and dark areas
- **Remote Surveillance**
  - **Compatible** with **Internet Explorer 6** and above on Windows operating system

#### DIMENSIONS

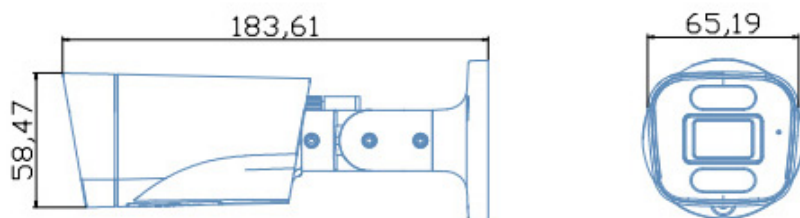

Dimensional tolerance:  $\pm 5$ mm

## ● SPECIFICATIONS

■ Device	
Image Sensor	1/2.7" CMOS image sensor
Max. Resolution	2304 x 1296 (3MP)
Lens	f2.8mm
Min Illumination	0.01 Lux, 0 Lux (IR LED ON)
Shutter Speed	Auto / Manual
IR LED	4 units
IR Effective Distance	Up to 25 meters
Day / Night	YES
WDR Mode	YES
RTC (real-time clock)	NTP / Manual
■ Video	
Compression	MJPEG / H.264 / H.265
Video Resolution	2560 x 1440 / 2304 x 1296 / 1080P / 720P / D1 / VGA / 640 x 360 / 480 x 360 / CIF
Frame Rate	30 IPS
Video Profile	High profile / Main profile / Base profile
Multiple Video Streaming	2 streams
Bitrate Control	CBR / VBR
Image Enhancement	WDR ( Level 0 ~ 255) / BLC / HLC / 2D DNR / 3D DNR
Day / Night Switch	Auto / Timing / External / Manual
Forced Anti-flicker	YES
Defog	YES
White Balance	AWB
Image Orientation	Flip / Mirror
Privacy Mask	4 customized areas
Text Overlay	YES
OSD Title	Location / font size / text configurable; text input (English & Chinese characters) and image upload (BMP) supported
■ Audio	
Microphone built-in	YES
Line out	YES
Encoding	G711 / G711A / ACC
Audio Adjustment	YES
■ Alarm & Event	
Detection Mode	Human (Day & Night) / Motion
Detection Schedule	YES
Motion Detection Area	1x1, 2x2, 3x2, 3x3, 4x3, 4x4, 8x8, 16x16, 22x18
Detection Alert	Audio alert with customized mp3 audio file(s)

\*The specifications are subject to change without notice.

## ● SPECIFICATIONS (CONTINUED)

■ Network	
LAN Port	RJ45 connector x 1 / 2KV lightning-proof
LAN Speed	10/100 Based-T Ethernet
Supported Protocols	TCP/IP, ICMP, HTTP, DHCP, DNS, RTP, RTSP, NTP, IPv4, IPv6, HTML5, ONVIF
ONVIF Compatible	YES
Number of Online Users	6
Remote Access	Internet Explorer 6 and above
■ General	
Web Interface Language	English, Traditional Chinese, Simplified Chinese, Russian, German, Italian, Turkish, Korean
Operating Temperature	-30°C ~ 50°C
POE	YES (IEEE 802.3af)
Power Source (±10%)	PoE (IEEE 802.3af) / DC12V
Current Consumption (±10%)	140mA (IR LED OFF); 370mA (IR LED ON)
Net Weight (g)	347
Certification	CE / FCC
Casing	IP67
Minimum Web Browsing Requirements	<ul style="list-style-type: none"> <li>• Intel core i3 or higher, or equivalent AMD</li> <li>• 2GB RAM</li> <li>• AGP graphics card, Direct Draw, 32MB RAM</li> <li>• Windows 10, Windows 8, Windows 7, DirectX 9.0 or later</li> <li>• Internet Explorer 6 or above (Windows Edge not supported)</li> </ul>

\*The specifications are subject to change without notice.