

## DGM5447T



5MP



H.265



Starlight



WDR



PoE



Line in / out



External I/O



Motorized Lens



IK10




MicroSD Card  
Recording




### 5MP H.265 IR Dome IP Camera

#### FEATURES

- **Starlight visibility** to offer clear & color images even at night
- Equipped with a **motorized lens of f2.8 ~ 12mm**
- MicroSD card support (up to 128GB) for **video storage**
- **ONVIF** () standard supported to simplify system integration
- **POE (Power-over-Ethernet)** support to eliminate the use of power cables and reduce installation costs
- **Line in / out** jacks available for audio transmission
- **External Alarm I/O device** connection
- IR effective range **up to 25 meters** for night surveillance
- **WDR** to increase image recognizability in overexposure and dark areas
- **IK10** rated, vandal-resistant case to withstand attempts to open or damage the camera
- **Remote Surveillance**
  - **Fully compatible** with **Internet Explorer 6** and above on Windows operating system

#### DIMENSIONS

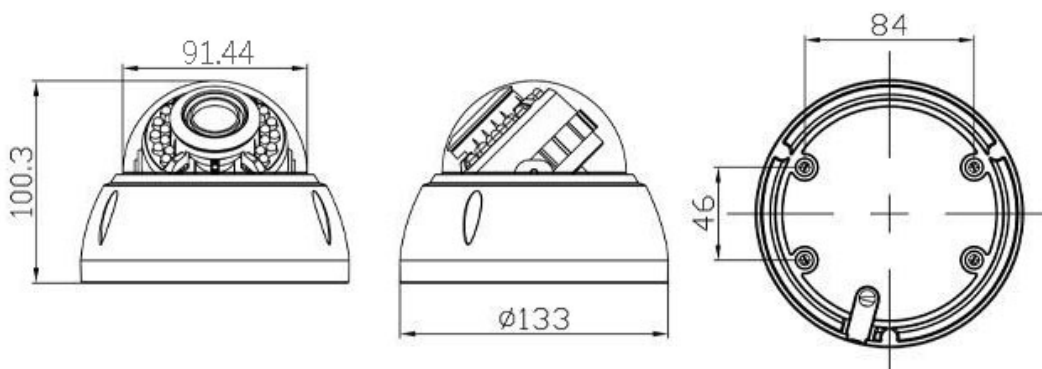

Dimensional tolerance:  $\pm 5\text{mm}$

## ● SPECIFICATIONS

■ Device	
Image Sensor	1/2.8" SONY CMOS image sensor
Max. Resolution	2592 x 1944 (5MP)
Lens	Motorized f2.8 ~ 12mm / F1.6 ~ F2.2 (Auto Focus)
Viewing Angle	Wide: 105.41° (Horizontal) / 56.45° (Vertical) / 125.12° (Diagonal) Tele: 34.5° (Horizontal) / 19.5° (Vertical) / 39.5° (Diagonal)
Min Illumination	0.001 Lux / F1.6(Wide)~F2.2(Tele), 0 Lux (IR LED ON)
Shutter Speed	AES
IR LED	24 units
IR Effective Distance	Up to 25 meters
Day / Night	YES
WDR Mode	WDR (120dB) / DWDR
RTC (real-time clock)	NTP / Manual
Micro SD Card Slot	YES (up to 128GB)
■ Video	
Compression	H.265 / H.264
Video Resolution	2592 x 1944 / 2560 x 1440 / 2048 x 1536 / 1080P / 720P / D1 / VGA / 640 x 360 / CIF
Frame Rate	25 IPS @ 2592 x 1922, 2560 x 1440 & 2048 x 1536 30 IPS @ 1920 x 1080, 1280 x 720, 640 x 480 & 320 x 240
Video Profile	High profile / Main profile / Baseline
Multiple Video Streaming	2 streams
S/N Ratio	More than 52dB (AGC off)
Bitrate Control	CBR / VBR
Image Mode	Normal / Super Starlight / Forced Frame Rate
Image Enhancement	WDR ( Level 0 ~ 255) / DWDR / BLC / HLC / 2D DNR / 3D DNR
Day / Night Switch	Auto / Schedule / Manual
Forced Anti-flicker	YES
Defog	YES
White Balance	AWB
Image Orientation	Flip / Mirror
Privacy Mask	4 customized areas
Text Overlay	YES
OSD Title	Location / font size / text configurable; English & Chinese characters supported
■ Audio	
Line in	YES
Line out	YES
Encoding	G711 / G711A / AAC
Audio Adjustment	Input & Output
■ Alarm & Event	
Alarm in	YES
Alarm out	YES
Detection Mode	Human (Day & Night) / Motion
Detection Schedule	YES
Motion Detection Area	1x1, 2x2, 3x3, 3x4, 4x4, 8x8, 16x16, 22x18
Human Detection Alert	Audio alert with customized mp3 audio file(s)

## ● SPECIFICATIONS (CONTINUED)

■ Storage	
On-Board Storage	Built-in memory card slot, supports microSD / SDHC / SDXC card up to 128GB
Overwrite	YES
Maximum Recoding Time / per File	2, 5, 10, 20 & 30 minutes configurable
Recording Schedule	YES
■ Network	
LAN Port	RJ45 connector x 1
LAN Speed	10/100 Based-T Ethernet
Supported Protocols	TCP/IP, ICMP, HTTP, DHCP, DNS, RTP, RTSP, NTP, IPv4, IPv6, HTML5, ONVIF
ONVIF Compatible	YES (Profile S)
Number of Online Users	6
Security	(1) Up to 10 user accounts with different access levels and passwords (2) IP address filtering (3) Digest authentication
Remote Access	Internet Explorer 6 and above
■ General	
Web Interface Language	English, Korea, Traditional Chinese, Simplified Chinese, Turkish, Italian, German, Russian & Croatian
Operating Temperature	-30°C ~ 50°C
Operating Humidity	30% ~ 90%
POE	YES (IEEE 802.3af)
Power Source (±10%)	PoE (IEEE 802.3af) / DC12V
Power Consumption (±10%)	PoE: 6.5W; DC adapter: 5.5W.
Net Weight (kg)	0.59
Certification	CE / FCC
Casing	IP67, IK10
Minimum Web Browsing Requirements	<ul style="list-style-type: none"> <li>• Intel core i3 or higher, or equivalent AMD</li> <li>• 2GB RAM</li> <li>• AGP graphics card, Direct Draw, 32MB RAM</li> <li>• Windows 10, Windows 8, Windows 7, DirectX 9.0 or later</li> <li>• Internet Explorer 6 or above (Windows Edge not supported)</li> </ul>

\*The specifications are subject to change without notice.