

AVX950 Smart Box




AVX950, the smart box, is the setup platform and portal to link to AVTECH IoT (Internet-of-Thing) accessories and build the following systems:

- Attendance system
- EcoSavi system
- Broadcast system
- Alarm system

To monitor each accessory individually linked by AVX950, a series of mobile app named EagleLinkIT is designed. Simply enter the IP information of this smart box on the EagleLinkIT app of the accessory you want to see, and you'll be able to access the accessory for instant management and control.

CONNECTION

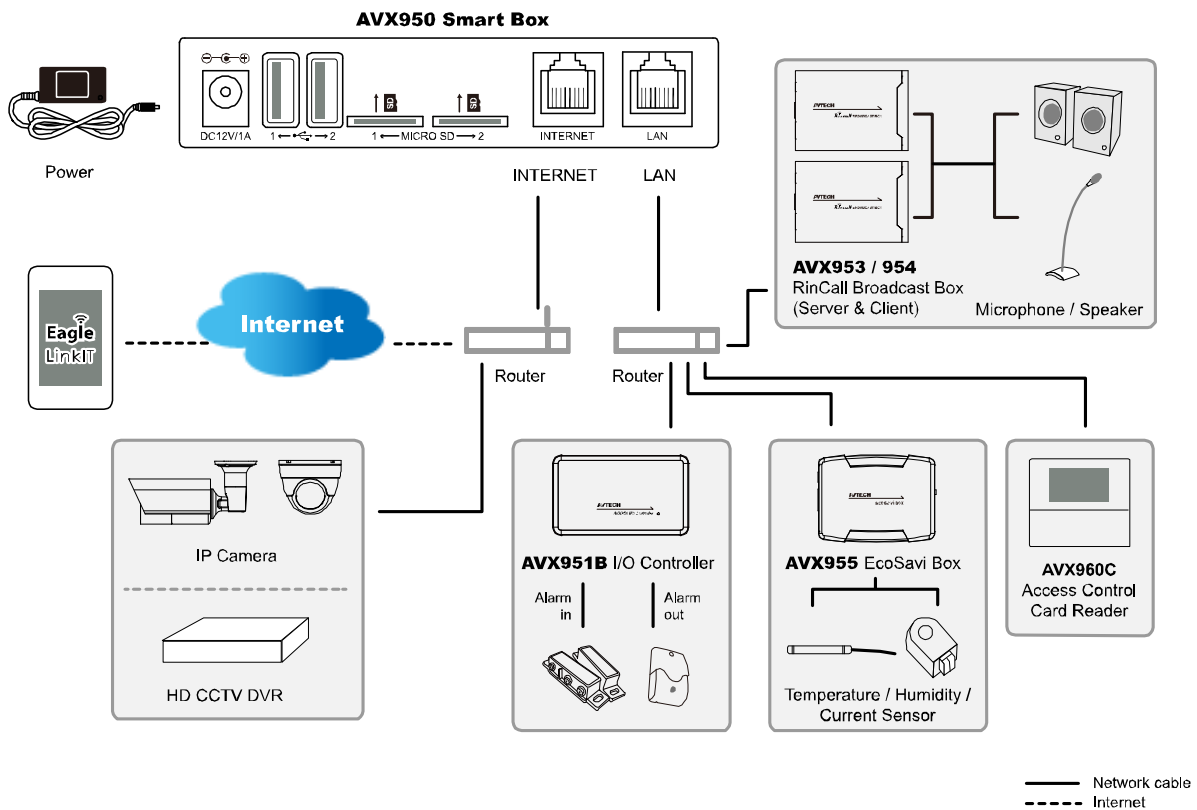


SPECIFICATIONS*

■ Network	
LAN Port	YES
LAN Speed	10/100 Based-T Ethernet
WAN Port	YES
WAN Speed	10/100 Based-T Ethernet
Supported Protocols	DHCP, TCP/IP, ICMP, HTTP, SIP, RTP, RTCP, IPv4, UPnP, UDP, SMTP, FTP
Number of Online Users	10
Security	Digest authentication
Remote Access	(1) Internet Explorer on Windows operating system (2) EagleLinkIT family apps on iOS & Android mobile devices
■ General	
DC 12V Out	DC12V/250mA
Emergency Call	YES
Operating Temperature	0°C ~ 40°C
Power Source	DC12V / 1A
Current consumption (±10%)	160mA (w/o Power Output)
Power Consumption (±10%)	2W (w/o Power Output)
Dimensions(mm)**	125 x 74 x 28.2
■ I/O	
RS485 Port	YES
MicroSD card slot	YES (2 slots)
■ Others	
Mobile Surveillance	iOS & Android
Event Notification	Push Video / Push Status
Status Indicator	One indicator, 3 different color lights for different status situations
RTC (real-time clock)	YES
Minimum Web Browsing Requirements	<ul style="list-style-type: none"> • Intel core i3 or higher, or equivalent AMD • 2GB RAM • AGP graphics card, Direct Draw, 32MB RAM • Windows 7, Windows Vista & Windows XP, DirectX 9.0 or later • Internet Explorer 7.x or later

* The specifications are subject to change without notice.

DIMENSIONS

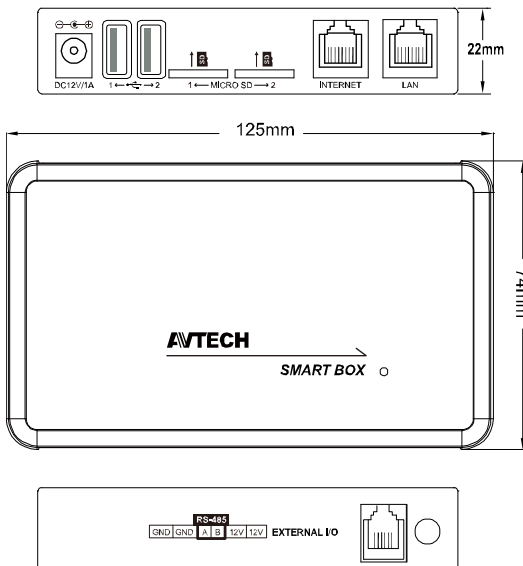

* Dimensional Tolerance: ± 5mm