


DGS4200PE

4xFE + 2xFE (UP-LINK) PoE Switch

FEATURES

- AI Watchdog Function
- 6KV Lightning & 8KV ESD Protection
- bt 60W High Power Support
- Auto-Adaption 250m Transmission

DIMENSIONS

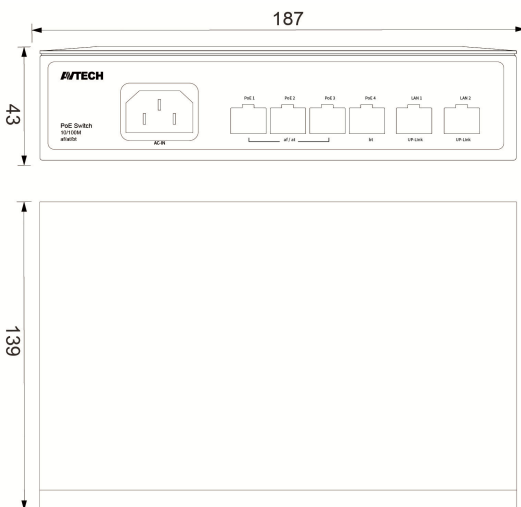

SPECIFICATIONS

Ports	<p>PoE (1~3): 10/100Mbps PoE ports (RJ45)</p> <p>PoE (4): 10/100Mbps PoE port (RJ45), Supports bt 60W High Power</p> <p>LAN (1~2): 10/100Mbps uplink ports (RJ45)</p>
Transmission Rate	200Mbps Full Duplex; 10 or 100Mbps Half Duplex
Transmission Distance	100Mbps /10Mbps,Auto-Adaption 250m
Performance Specifications	<p>Bandwidth: 1.2Gbps</p> <p>Network Latency (10 to 100Mbps): ≤ 16 μs (use the 64byte package size)</p> <p>MAC address table: 2K</p> <p>The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port</p>
Networking Standard	<p>IEEE 802.3i 10BASE-T</p> <p>IEEE 802.3u 100BASE-TX</p> <p>IEEE 802.3x Flow Control</p> <p>IEEE 802.3af/at/bt Power over Ethernet</p>
Power Support	<p>Power Input: AC 90~240V Total ≤ 65W</p> <p>AI Watchdog: Port 1~4</p> <p>Power Output: PoE1~3 Port: 1/2 (+52V), 3/6(GND)≤30W PoE 4 Port: 1245 (+53V), 3678 (GND) Compatible 1/2 (+52V), 3/6 (GND) ≤ 60W</p>
Protection Level	<p>Lightning Protection: 6KV</p> <p>ESD Protection: 8KV</p>
Dimensions (mm)	187 * 139 * 43
Net Weight (kg)	1
Working Environment	<p>Operating Temperature: -30°C~60°C</p> <p>Storage Temperature: -40°C~70°C</p> <p>Operating Humidity: 10%~90% Non-condensing</p> <p>Storage Humidity: 5%~90% Non-condensing</p>
Package Content	AC Power Cable, User Manual