



DGS0040PGM


24xGE + 4xSFP

L2 Managed PoE Switch

FEATURES

- Gigabit L2+ managed switch
- RSTP/MSTP spanning tree support
- 802.1q VLAN support
- IPV6, ACL, SNMP, SSL support

DIMENSIONS

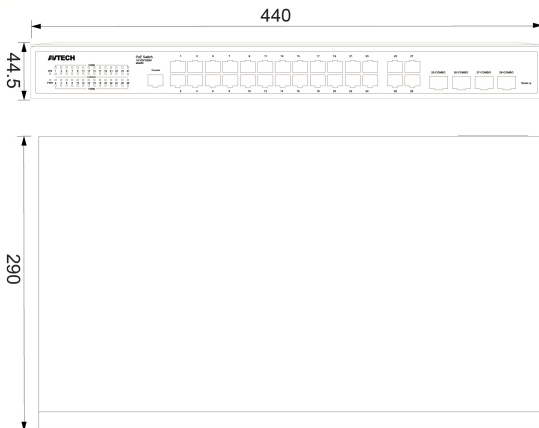

SPECIFICATIONS

Ports	28 x 10/100/1000Mbps RJ45 ports 4 x 1000Mbps SFP fiber ports 4 x 1000Mbps combo 1 x Console port
Standards	IEEE 802.3i, 802.3u, 802.3ab, 802.3x, 802.3az, 802.3at, 802.3af
Power Supply	AC100~240V 50/60Hz
Indicators	Electrical port indicator, optical port indicator, power input indicator, system running indicator
Network Media (Cable)	10Base-T: UTP category 3, 4, 5 cable (maximum 100m) 100Base-Tx: UTP category 5, 5e cable (maximum 100m) 1000Base-T: UTP category 5e, 6 cable (maximum 100m) 1000Base-X: MMF, SMF
PoE Ports (RJ45)	24 x PoE ports compliant with 802.3af/at
PoE Pin Definition	1/2(+), 3/6(-)
Total Power	400W
Transfer Method	Store-and-Forward
MAC Address Table	8K
Switching Capacity	56Gbps
Packet Forwarding Rate	41.664Mbps
Packet Buffer	4.1Mbit
Jumbo Frame	10KBytes
Dimensions (mm)	440 * 290 * 44.5
Environment	Operating Temperature: 0°C~45°C(0°F~113°F) Storage Temperature: -40°C~70°C(-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~95% non-condensing
Package Content	AC Power Cable, User Manual