

DG1006A



TRIBRID 8CH HD CCTV DVR

FEATURES

Free P2P Cloud EaZy Networking*

- ❖ Cloud EaZy Networking available to connect this device to Internet automatically in three steps with our free mobile app, EagleEyes.
- ❖ The “Buddy” feature to share the device access permission to other people.
- ❖ Device login / out notifications reported.




Push Status - Active Event Notification with EagleEyes App

- ❖ Push Status to send instant notifications for system events, such as video loss or HDD data removal.



Tribrid Video Input

- ❖ Supports AHD / TVI / 960H video input.

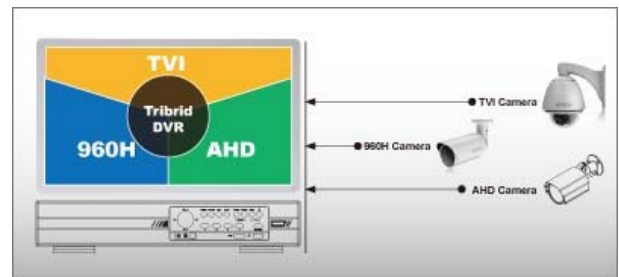

Video Backup

- ❖ Regular backup could be configured to automatically copy video footages to the specified location (USB drive or FTP) at the specified time.

Remote Surveillance

- ❖ Fully compatible with iOS and Android devices, and Internet Explorer on Windows operating system
- ❖ CMS Lite for 32 devices central management
- ❖ Applicable also to Apple’s media player, QuickTime.

Independent Channel Control

- ❖ Definable “Resolution” / “Quality” / “IPS” by channels at your preferences to increase the recording efficiency, and avoid any important scenes to be missed.

Remote Independent Operation

- ❖ Channel switching is independent from the local site, allowing users to have private image monitoring remotely.

* EaZy Networking is a free P2P cloud service to connect AVTECH devices to the Internet automatically by plug-and-play, enabling you to check the live view via your mobile device or laptop at anytime (in 64 kbps).

▶ SPECIFICATIONS

▼ Video		
Video System	NTSC / PAL (auto detection)	
Video Compression Format	H.264	
Video Signal	AHD / TVI / 960H	
Video Input	8 channels (Composite video signal 1 Vp-p 75Ω BNC)	
Video Output	VGA	YES
	HDMI	YES
▼ Record & Backup		
Maximum Recording Rate	1080P	1920 x 1080 pixels with 120 IPS
	720P	1280 x 720 pixels with 240 IPS
	QHD	960 x 540 pixels with 240 IPS
	Frame	704x480 pixels with 240 IPS <NTSC> / 704x576 pixels with 200 IPS <PAL>
	Field	704 x 240 pixels with 240 IPS <NTSC> / 704x288 pixels with 200 IPS <PAL>
	CIF	352x240 pixels with 240 IPS <NTSC> / 352x288 pixels with 200 IPS <PAL>
Recording Mode	Manual / Timer / Motion / Alarm / Remote	
Pre-alarm Recording	YES	
Playback Channel	8CH	
Quick Search	Time / Motion / Alarm search mode	
Backup Device	USB 2.0 flash drive / Network	
Regular Backup	YES	
▼ Audio		
Audio Input	1 audio input	
Audio Output	1 Audio output (Mono)	
▼ General		
Hard Disk Storage**	1 SATA HDD	
SATA Interface	YES	
Image Quality Setting	SUPER BEST / BEST / HIGH / NORMAL	
USB Mouse Control	YES	
Motion Detection Area	16 × 12 grids per channel	
Motion Detection Sensitivity	3 adjustable parameters for accurate detection	
Event Notification	Push Status / FTP / E-Mail	
Picture Zoom	2X digital zoom	
PTZ Control	YES	
Alarm I/O	1 input, 1 output	
Key Lock (Password Protection)	YES	
User Level	4 user levels for different access privilege	
Video Loss Detection	YES	
Camera Title	Supports up to 25 letters	
Video Adjustable	Hue / Saturation / Contrast / Brightness	
Date Display Format	YY/MM/DD, DD/MM/YY & MM/DD/YY	
Daylight Saving	YES	
Power Source (±10%)	DC12V / 2A	
Operating Temperature	10°C ~ 40°C (50°F ~ 104°F)	
Operating Humidity	10% ~ 85%	
Dimensions (mm)***	345(W)×58.8(H)×223(D)	
▼ Network		
Ethernet	10/100 Base-T. Supports remote control and live view via Ethernet	
Network Protocol	TCP/IP, PPPOE, DHCP and DDNS	

▶ SPECIFICATIONS

▼ Remote Surveillance from PC		
Compatible Operating System	Windows & MAC	
Compatible Program	Web Browser:	Internet Explorer, Google Chrome & Safari
	CMS Lite:	32CH central management software for Windows OS
	QuickTime:	For both Windows and MAC operating systems
Max. online users	20	
Web Transmitting Compression Format	H.264	
Network Live Audio	YES	
Remote Independent Operation	YES	
Remote Event Download & Playback	YES	
▼ Mobile Surveillance		
App	EagleEyes	
Compatible Devices	iOS & Android devices	
Push Status	YES	
▼ Others		
EaZy Networking	YES	
DCCS Support	YES	
AVTECH Free DDNS service	YES	
Multiplex Operation	Live display / record / playback / backup / network operations	
System Recovery	System auto recovery after power failure	
Optional Peripherals	HDMI Matrix (HDM02)	

* The specifications are subject to change without notice.

** 1 HDD capacity up to 4TB

*** Dimensional tolerance: ±5mm

▶ REAR PANEL

