

# DGC2105ATS


## 2MP 4-in-1 IR Bullet Camera



### ● FEATURES

- (1) 1/2.9" CMOS Sensor with 2MP video output
- (2) Quadbrid video output with TVI, CVI, AHD & CVBS to fulfill different customers' requirements
- (3) Low light sensitivity of 0.01 Lux / F1.6, 0Lux (IR LED ON)
- (4) Microphone built-in for audio recording
- (5) D-WDR to increase image recognizability in overexposure and dark areas
- (6) Day and night 24-hour surveillance with IR effective distance to 25 meters
- (7) IP67 for weather-proof application
- (8) Camera parameters adjustable when used with AVTECH HD CCTV DVR

### ● DIMENSIONS\*

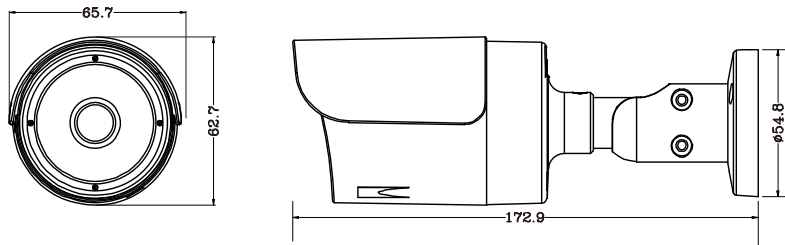

\*Dimensional Tolerance: ± 5mm

### ● SPECIFICATIONS\*

MODEL	DGC2105ATS
Video Mode	TVI, CVI, AHD & CVBS switchable
Pick-up Element	1/2.9" CMOS
Number of Pixels	1920(H)×1080(V)
Video Frame Rate	1080P@25/30fps
Min. Illumination	0.01Lux / F1.6 (AGC ON), 0 Lux (IR LED ON)
S/N Ratio	62dB
Shutter Speed	AUTO
Lens	f3.6mm/F1.6
Lens Angle	83.8° (Horizontal) / 42.7° (Vertical) / 100.1° (Diagonal)
IR LED	18 units
IR Effective Distance	25 meters
Day & Night Mode	Auto / Color / (B/W) / EXT
Microphone Built-in	YES (TVI Mode available)
Noise Reduction	2D NR
White Balance	ATW / Manual
AGC	YES
BLC	YES
WDR	D-WDR
Flip	YES
Mirror	YES
IP Rating	IP67
Operating Temperature	-20°C ~ 60°C
Operating Humidity	10% - 90%RH
Power Source (±10%)	DC12V
Power Consumption (±10%)	< 5W
Net Weight (g)	327
Optional Bracket / Junction Box	AVA126-WHKT / AVA156-WHKT / AVA456-BBKT

\* The specifications are subject to change without notice.